

## FRED Modules




**VRRM** 600V

**IFAV** 100 A

### Applications

- Inversion Welder
- Uninterruptible Power Supply (UPS)
- Plating Power Supply
- Ultrasonic Cleaner and Welder
- Power Factor Correction (PFC) Circuit
- Converter & Chopper

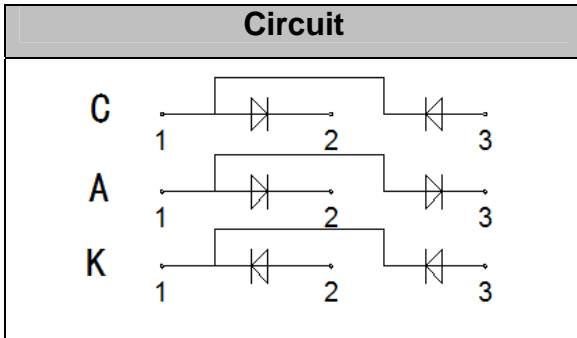

### Features

- Soft Reverse Recovery Characteristics
- Ultrafast Reverse Recovery Time
- Low Reverse Recovery Loss
- Low Forward Voltage
- High Surge Current Capability
- Low Inductance Package

### Module Type

TYPE			VRRM	VRSM
MF100C06F1	MF100A06F1	MF100K06F1	600V	660V

### Maximum Ratings

Symbol	Conditions	Values	Units
$V_R$		600	V
$V_{RRM}$		600	V
$I_{F(AV)}$	$T_C=90^\circ\text{C}$ , Per Diode	100	A
$I_{F(RMS)}$	$T_C=95^\circ\text{C}$ , Per Diode	150	A
$I_{FSM}$	1/2 Cycle , 50Hz, Sine	1300	A
	1/2 Cycle , 60Hz, Sine	1500	A
$I^2t$	$T_J=45^\circ\text{C}$ , $t=10\text{ms}$ , 50Hz, Sine	8450	$\text{A}^2\text{s}$
	$T_J=45^\circ\text{C}$ , $t=8.3\text{ms}$ , 60Hz, Sine	11250	$\text{A}^2\text{s}$
$P_D$		280	W
Visol	AC, Ton=1min	3000	V
$T_J$		-40 to +150	$^\circ\text{C}$
$T_{STG}$		-40 to +125	$^\circ\text{C}$
Torque	Recommended (M5)	$3 \pm 15\%$	N·m
Torque	Recommended (M5)	$3 \pm 15\%$	N·m
Weight		100	g

### Thermal Characteristics

Symbol	Conditions	Values	Units
$R_{th(j-c)}$	Per diode	0.4	$^\circ\text{C/W}$



## Electrical Characteristics

Symbol	Conditions	Values			Units
		Min.	Typ.	Max.	
$I_{RM}$	$V_R=600V$	--	--	50	$\mu A$
	$V_R=600V, T_J=125^\circ C$	--	--	1	mA
$V_F$	$I_F=100A$	--	1.25	1.4	V
	$I_F=100A, T_J=125^\circ C$	--	1.1	1.3	V
trr	$I_F=1A, V_R=30V, di_F/dt=-200A/\mu s$	--	45	50	ns
trr	$V_R=300V, I_F=100A, di_F/dt=-200A/\mu s, T_J=25^\circ C$	--	105	--	ns
$I_{RRM}$		--	10	--	A
trr	$V_R=300V, I_F=100A, di_F/dt=-200A/\mu s, T_J=125^\circ C$	--	200	--	ns
$I_{RRM}$		--	18	--	A

## Performance Curves

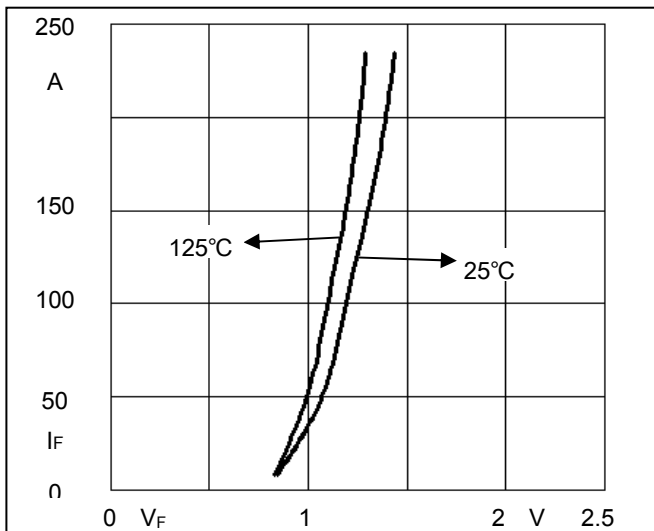


Fig1. Forward Voltage Drop vs Forward Current

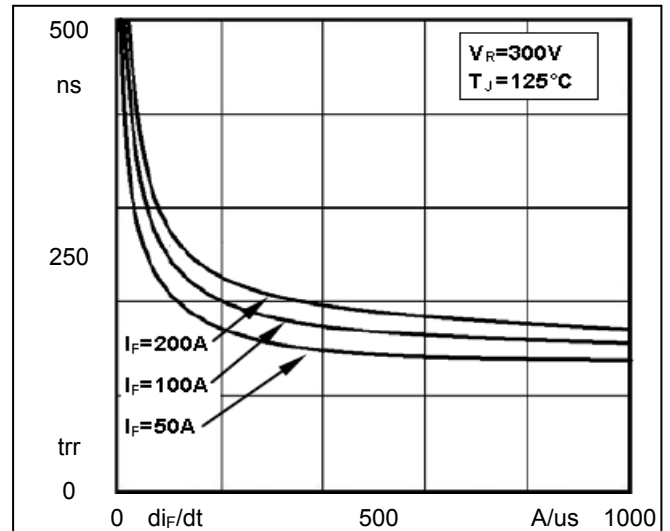


Fig2. Reverse Recovery Time vs  $di_F/dt$

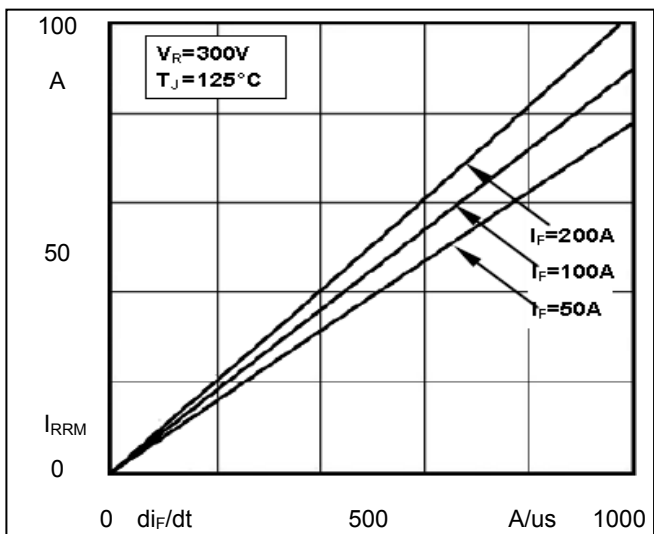


Fig3. Reverse Recovery Current vs  $di_F/dt$


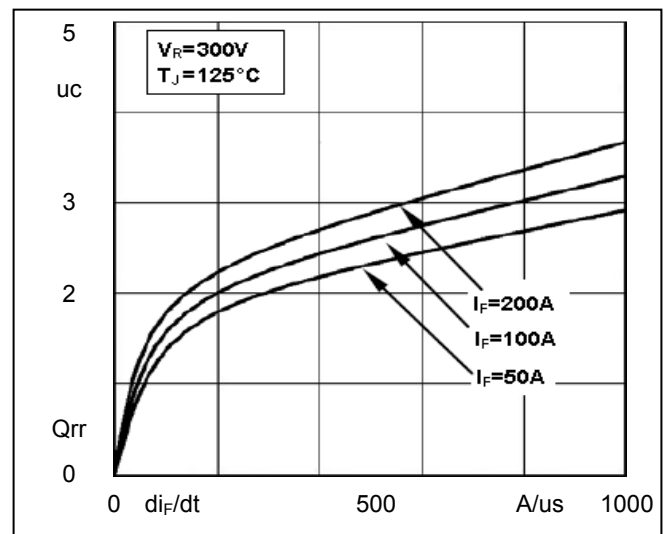


Fig4. Reverse Recovery Charge vs  $di_F/dt$

## Package Outline Information

CASE: F1

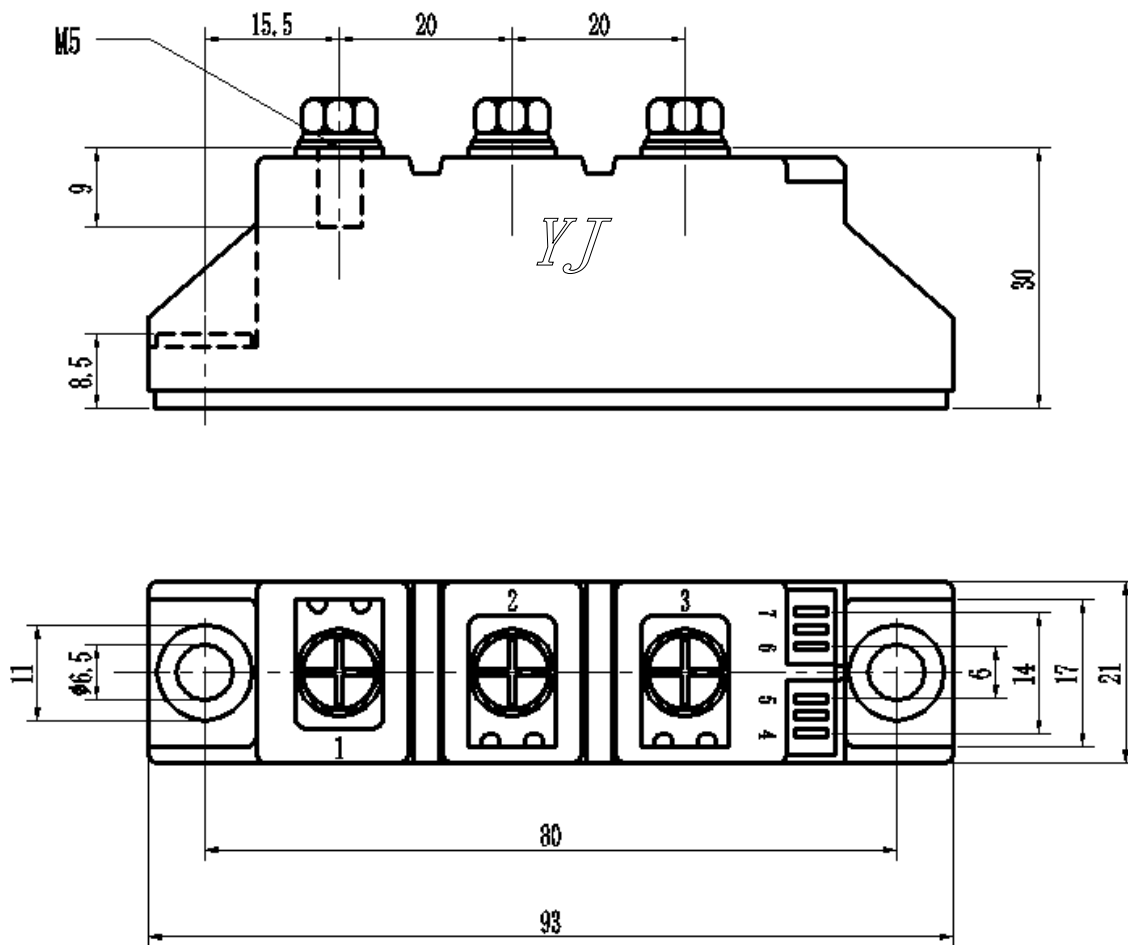

Dimensions in mm